



6-CNJ-120

12V120Ah

Edition:2016.6
By Frank

FUWEI ENERGY

<http://www.fwny.net/en/>

Component	Positive	Negative	Container	Cover	Safety Valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Wire	AGM	GEL

To get the most out of your eco-friendly renewable energy system for home, RV or back-up power, you need a rugged, long-lasting solar photovoltaic (solar PV) battery from FUWEI energy. A high-capacity solar battery is perfect for backup systems, off-grid configurations and other applications that call for deep-cycle storage. Choose from absorbed glass mat (AGM) and gel-cell batteries for all your solar application needs.

Performance characteristics

Nominal Voltage 2V

Number of cell one

Nominal Capacity at 25 °C/77 °F

240Hr at 0.6 A to 1.9V-- 145 Ah

100Hr at 1.41 A to 1.85V-- 141 Ah

10Hr at 12 A to 1.8V-- 120 Ah

Internal Resistance

Fully charged battery at 25 °C

≤ 5 mΩ

Average Self-discharge at 20 °C/68 °F

<3% lost of capacity per month

Operating Temperature range:

Discharge at -40~70 °C

Charge at -10~60 °C

Storage at -20~60 °C


Charge Methods constant voltage charge at 25 °C

Cycle use--2.4~2.45V/cell;

Maximum initial charging current 16 A

Temperature compensation

-5mV/cell/ °C

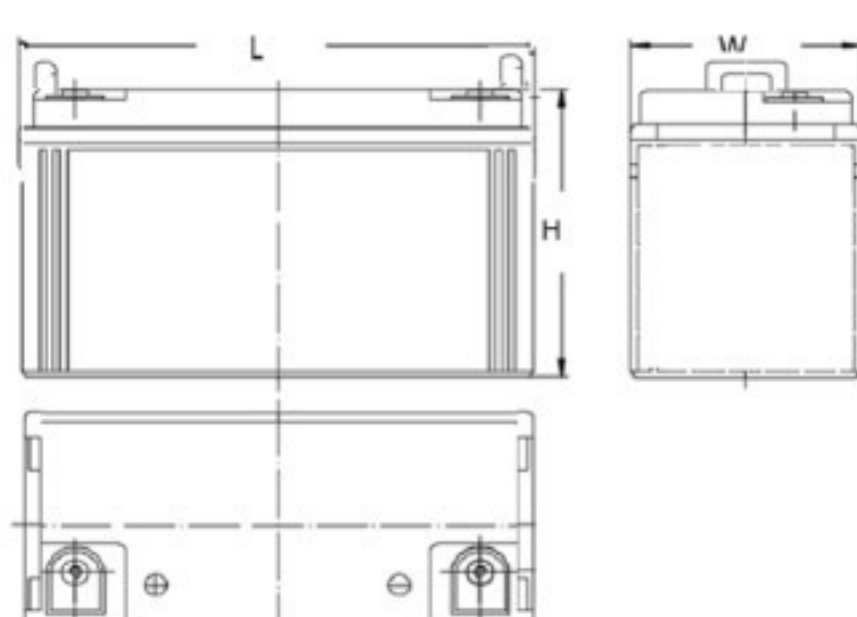

	mm/Kg	inch/lb
Length	408	16.1
Width	174	6.85
Height	238	9.4
TH	238	9.4
Weight	35	77.1
Terminal	φ 4.0mm*1.5m	Wire

JIANGSU FUWEI Energy CO.,LTD.

Quality Achievement Brand Build Our Future



6-CNJ-120

12V120Ah

FUWEI ENERGY

<http://www.fwny.net/en/>

Constant Power discharge / WPC (25°C/77°F)


End voltage/cell	3 h	5 h	10 h	20 h	50 h	100 h	120 h	240 h
1.75V			21.8	10.4	4.52	2.11	1.88	0.992
1.80V			21.5	10.2	4.47	2.10	1.85	0.975
1.85V			20.8	9.88	4.31	2.04	1.79	0.944
1.90V			20.1	9.58	4.19	1.99	1.73	0.912

Constant current discharge / A (25°C/77°F)

End voltage/cell	3 h	5 h	10 h	20 h	50 h	100 h	120 h	240 h
1.75V			12.2	5.80	2.90	1.49	1.26	0.667
1.80V			12.0	5.70	2.85	1.46	1.24	0.656
1.85V			11.5	5.47	2.73	1.41	1.19	0.629
1.90V			11.1	5.25	2.62	1.35	1.15	0.604

Note: The above characteristics data are average values obtained within three charge/discharge cycles not the minimum

All data shall be changed without notice. FUWEI reserves the right to explain and update the information contained hereinto

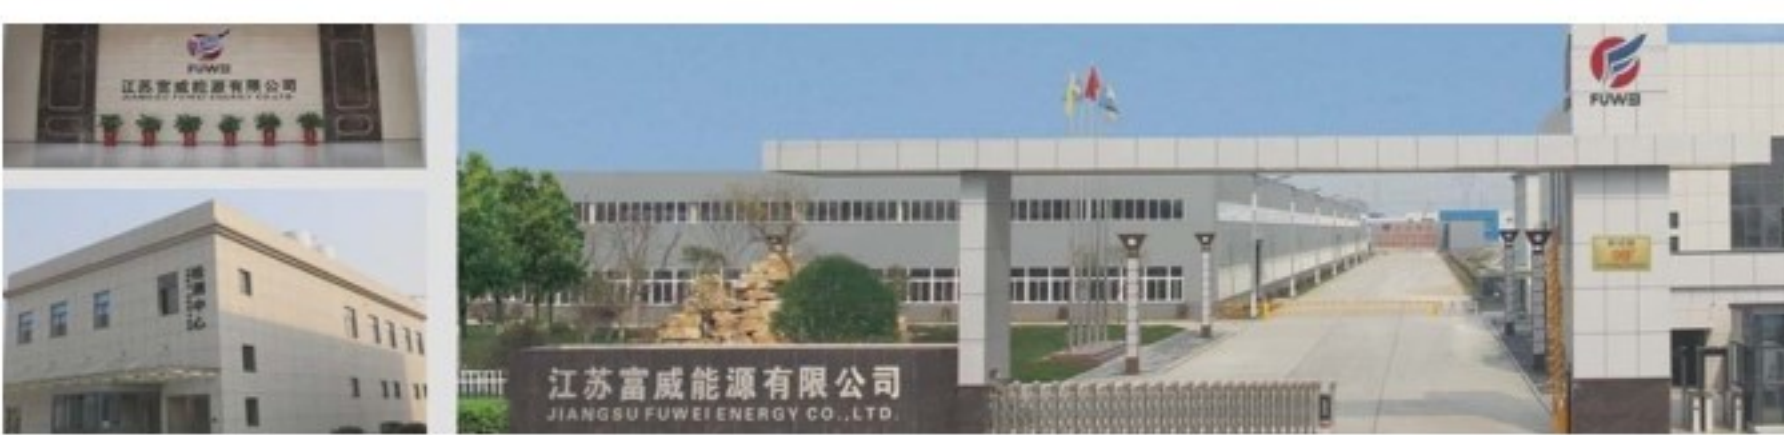

Application

- Telecom Systems
- Electric Wheelchair
- Solar System
- Marine Equipment
- Wind Power System
- Emergency Power System
- Wheelchair

General Features

- Environmentally friendly
- Long Service Life, in Cyclic
- Lower internal Resistance
- High Reliability and Good Quality
- International Standard, JIS and DIN
- High Power Density
- lead-tin-calcium alloy grids for long service life
- Thick pasted plates with high quality

JIANGSU FUWEI Energy CO.,LTD.

Quality Achievement Brand Build Our Future



6-CNJ-120

12V120Ah

FUWEI ENERGY

<http://www.fwny.net/en/>

